

# VC-5/9/18MX2 Series

5/9/18 Megapixel High Speed CMOS Digital Camera  
with CoaXPress 2.0 Interface



The VC-5/9/18MX2 cameras, the latest model of the industrial proven VC series, are new 5/9/18-megapixel CoaXPress cameras and based on the CMOS global shutter image sensor technology (GMAX2505, 2509, 2518) from Gpixel. In the case of the VC-5MX2-289I camera, it offers up to 289 frames per second at 2,592 × 2,160 resolution. The camera comes with the next generation CoaXPress 2.0 (CXP-12) interface delivering up to 25 Gigabits per second over two coaxial cables. These combinations of the CMOS sensor technology and CoaXPress 2.0 interface set a new standard for industrial, scientific and surveillance digital imaging applications. Customers in the industrial market can take advantage of simple coax cabling to transmit images at rates and distance above and beyond previous standards. The high-speed and high-resolution camera is ideal for wide range of demanding applications such as FPD, PCB and semiconductor inspections.

**VIEWORKS**

[vision.vieworks.com](http://vision.vieworks.com)

## Main Features

- High Speed 5/9/18 Megapixel CMOS Image Sensor
- CoaXPress 2.0 Interface up to 289 fps at 25 Gbps using 2 CH (VC-5MX2-M/C289)
- Power over CoaXPress (PoCXP)
- Global Shutter CMOS Technology
- DSNU and PRNU Correction
- Flat Field Correction
- Defective Pixel Correction

## Applications

- Flat Panel Display Inspection
- Electronics Inspection
- Semiconductor Inspection
- Document / Film Scanning
- Factory Automation, Robotics or AOI

## Specifications

Model	VC-5MX2-M/C289	VC-9MX2-M/C262	VC-18MX2-M/C132
Resolution (H × V)	2,592 × 2,160	4,192 × 2,160	4,480 × 4,096
Sensor	Gpixel GMAX2505	Gpixel GMAX2509	Gpixel GMAX2518
Sensor Size (Diagonal)	6.5 mm × 5.4 mm (8.45 mm)	10.5 mm × 5.4 mm (11.8 mm)	11.27 mm × 10.24 mm (15.22 mm)
Sensor Type	High Speed CMOS Image Sensor		
Pixel Size	2.5 μm × 2.5 μm		
Interface	CoaXPress 2.0		
Max. Frame Rate	289 fps	262 fps	132 fps
Exposure Time (1 μs step)	1 μs – 60 s		
Partial Scan (Max. Speed)	27459.9 fps at 2 Lines (8 bit)	24844.7 fps at 2 Lines (8 bit)	14101.0 fps at 2 Lines (8 bit)
Pixel Data Format	Mono	Mono 8 / 10	
	Color	RG Bayer 8 / 10	
Electronic Shutter	Global Shutter		
Digital Gain	1× ~ 32×		
Black Level Control	0 – 63 LSB at 10 bit (1 LSB step)		
Exposure Mode	Free-Run, Timed, Trigger Width		
External Trigger	3.3 V ~ 24.0 V, 10mA, Logical Level Input Optically isolated, CoaXPress Control Port		
Software Trigger	Asynchronous, Programmable via Camera API		
Dynamic Range	62 dB		
Dimension / Weight	50.0 mm × 50.0 mm × 91 mm, 270 g (C-mount)		
Temperature	Operating: 0°C ~ 40°C, Storage: -40°C ~ 70°C		
Lens Mount	C-mount		
Power	Adapter	11 ~ 24 V DC, Typ. 16 W	
	PoCXP	24 V DC, Minimum of two PoCXP cables required	
Compliance	CE, FCC, KC		


# VC-5/9/18MX2 Series

5/9/18 Megapixel High Speed CMOS Digital Camera with CoaXPress 2.0 Interface




## Spectral Response


VC-5/9MX2

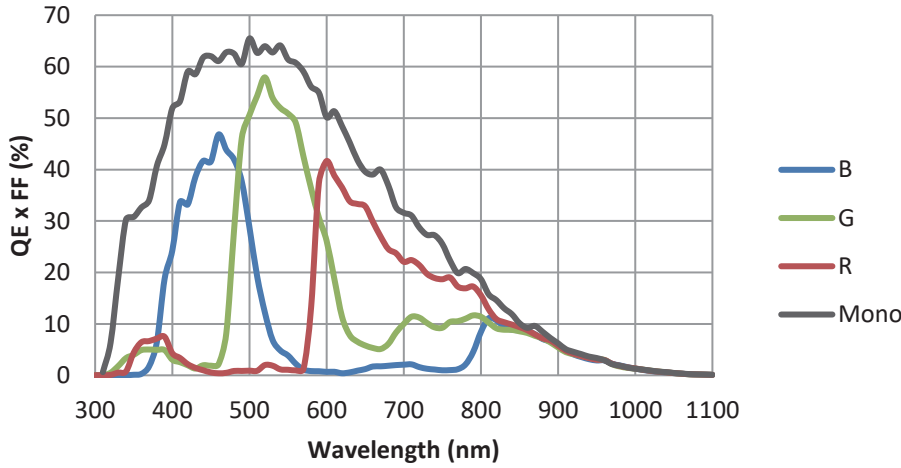

VC-18MX2

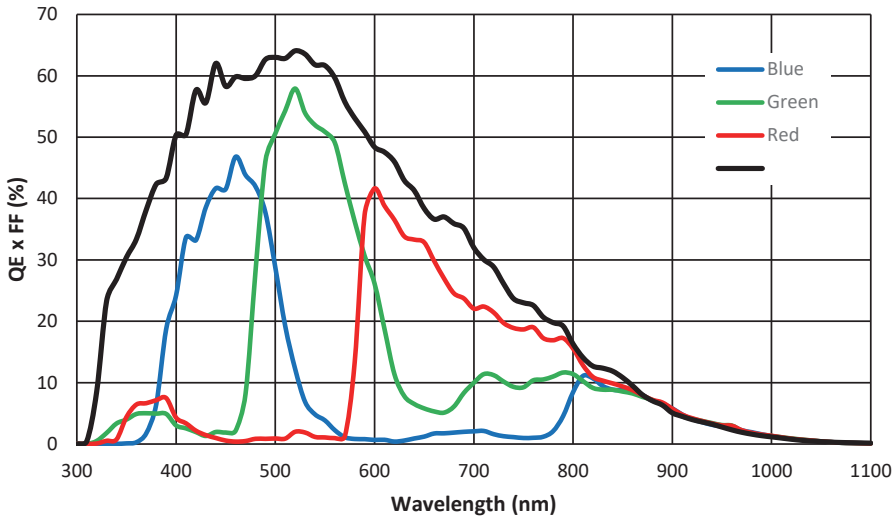


## Ordering Scheme

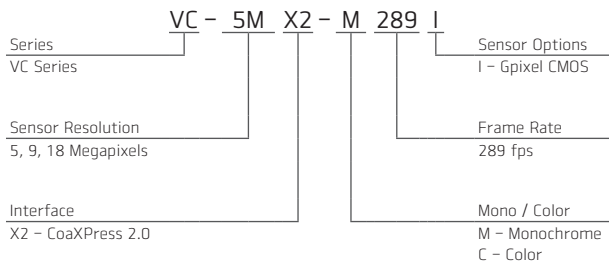

## Connector Specification

Power



- 1: +12V DC
- 2: Trigger IN+
- 3: Trigger IN-
- 4: Output+
- 5: Output- (HR10A-7R-6PB)
- 6: DC Ground

Data Transfer / Communications



- CH1: Master Connection
- 75 Ω, Micro-BNC (HD-BNC)

Connectors on camera body

# VC-5/9/18MX2 Series

5/9/18 Megapixel High Speed CMOS Digital Camera with CoaXPress 2.0 Interface



## Mechanical Dimensions

Unit: mm

